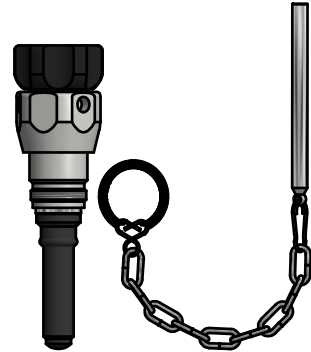


SPARE PARTS FOR I 40 MM HEAD 315541/43

ART. NO. 310041E

GENERAL

- The KEOFITT CLASSIC "INGOLD" Sampling Valve owes its hygienic design and one-piece construction to the original KEOFITT valve. For 40 MM Ingold ports.
- The product to be sampled should have a maximum viscosity of 0-1.000 cP and should not contain particles larger than 2 mm diameter.
- The valve can be sterilized by means of SIP (EHEDG test) and cleaned by means of CIP (EHEDG certified). Not recommended for autoclave due to plastic parts.
- The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.



FEATURES

- Installation: 40 mm Ingold port
- Operation: Turn knob (open left)
- Inlet / Outlet: Depending on choice of valve body
- Membrane: EPDM (EPL-60 - black)

CERTIFICATION*

· Conforms to 3-A · EHEDG CIP · 3.1 Material Certificate · EU 1935/2004

TECHNICAL DATA

Material (product contact)

· Membrane EPDM (EPL-60 - black)

Material (without product contact)

· Steel parts AISI 303L (1.4305)
 · Steel parts AISI 316 (1.4401)
 · Steel parts AISI 316L (1.4404)
 · Knob HDPE (black)

Membrane

· Article EPDM, BLACK (# 310052)
 · Certification* FDA · USP · EU 1935/2004

Pressure & Temperature

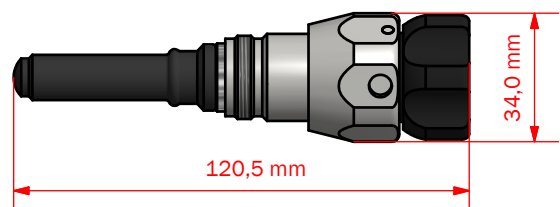
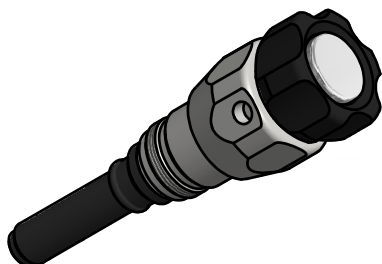
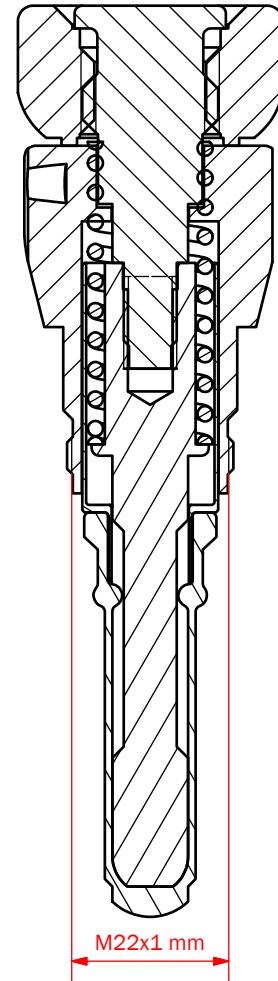
· Pressure 0 - 6 bar (g) / 0 - 87 psi (g)
 · Temperature 1 - 130 °C / 34 - 266 ° F
 · Air supply -


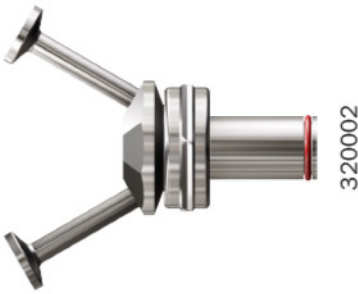


Net Weight

· Kg/lbs 0,294 kg / 0,65 lbs

Spareparts

773141EPDM PARTS FOR I 40 MM HEAD 310041E/43E



Hose Piece	Standard for 40 mm port length	Standard for 52 mm port length	
Mini Tri-Clamp	<p>Not available</p>  <p>310002</p>	<p>Not available</p>  <p>320002</p>	<p>Not available</p>  <p>320005</p>
Welding liner	<p>On request</p>	<p>On request</p>	<p>On request</p>
	<p>On request</p>	<p>On request</p>	<p>On request</p>  <p>320007</p>