



STEAM BOILER ART. NO. 550000

GENERAL



The KEOFITT STEAM BOILER is a portable steam source that offers the ability to steam your KEOFITT sampling valve where steam is otherwise unavailable. All you need is water and the appropriate gas.



To be used with all steam sterilizable sampling valves.



Gas is NOT included!



Incl. hose with quick release tube fittings, 0.5 m (art. no. 550002).



CAUTION! Open flame, it is recommended to use gloves during the sterilising process as both Steam Boiler, fittings and sampling valve become hot during the process

TECHNICAL DATA

Material (without product contact)

AISI 304 (1.4301) · Steel parts Aluminium 6061 EPDM · Water tank

· 0-ring

AISI 304 (1.4301) · Foot

Capacity

· Capacity 400 ml

Net Weight

· Kg/lbs 3,200 kg

Burner


Fuel: Butane Fuel capacity: 30 g/50 ml


Burn time: About 35 min. at max. burn, 60 min. at half-burn Ignition:

Push-button Piezo

Spareparts

10 PACK O-RING 9,3x2,4 EPDM (FDA) 900822

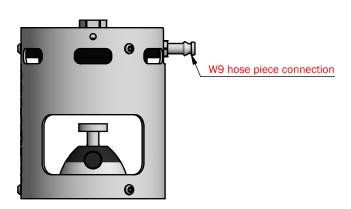

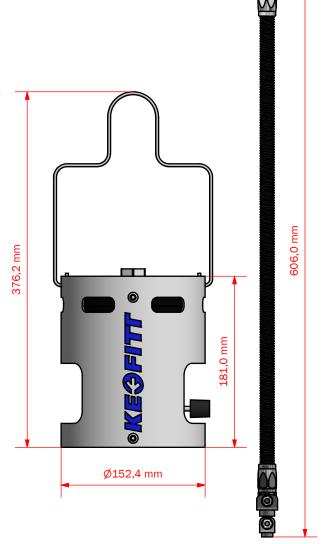

Last updated 09-06-2016 Data Sheet from keofitt.dk