






VALVE HEAD W9 TYPE N, FFKM

ART. NO. 600044F

GENERAL

-  The KEOFITT CLASSIC W9 Sampling Valve is the original and leading sterilizable sampling valve in the world. Used in all industries for decades. + 320 standard valve configurations. Unique serial no. for each valve ("E" = internal electro polish).
-  The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
-  Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media (EHEDG certificate available). Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP (EHEDG test report available) or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact Keofitt.
-  Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø3 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

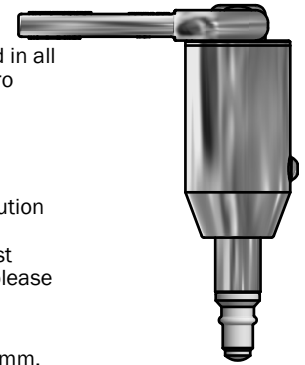

FEATURES

-  Installation: Threaded connection
-  Operation: Pneumatically operated/lever handle
-  Inlet / Outlet: Depending on choice of valve body
-  Membrane: FFKM (PB794 - white)

CERTIFICATION*

· Conforms to 3-A · EHEDG CIP · EU 1935/2004

TECHNICAL DATA

Material (product contact)

· Membrane FFKM (Perfluorelastomer)

Material (without product contact)

· Steel parts AISI 303L (1.4305)
· Steel parts AISI 316L (1.4404)

Membrane

· Article FFKM, WHITE (# 600053)
· Certification* FDA · USP · EU 1935/2004

Pressure & Temperature



· Pressure 0 - 6 bar (g) / 0 - 87 psi (g)
· Temperature 250° C / 482° F
· Air supply

Net Weight







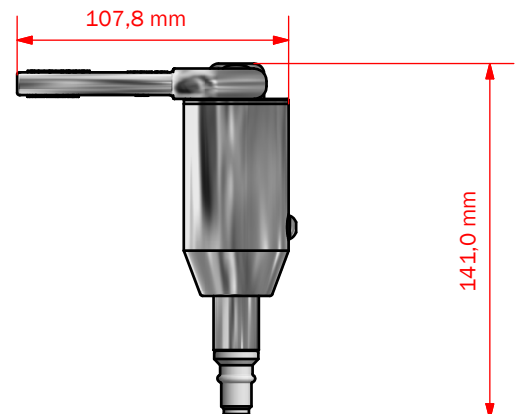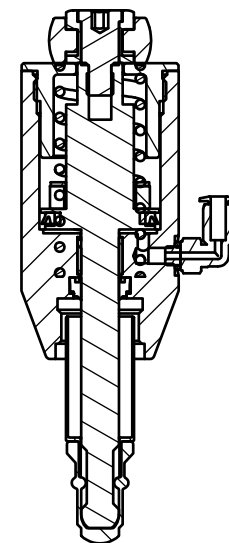













· Kg/lbs 0,826 kg / 1,821 lbs

Spareparts

| | |
|--------|-----------------------------|
| 550184 | O-ring |
| 600053 | Membrane |
| 600149 | Bushing |
| 600170 | Handle |
| 600838 | Swivel elbow for airylinder |
| 850820 | Piston Ring |
| 850821 | Scraper Ring |
| 850822 | Slide Bearing |



W 9 HEADS

| | | Connection bodies | | | | | | Welding bodies | | | |
|--|--|---|---|--|---|--|---|---|---|---|-----------------------|
| | | Thread | Clamp 2" | Clamp 1" | Mini Clamp | Varivent Ø68 | Varivent Ø50 | Pipe Welding | Pipe Welding | Tank Welding | |
| | |  |  |  |  |  |  |  |  |  | Hoses Piece |
| | | 850031 | 850003 | 850021 | 850036 | 850009 | 850008 | 850014 | 850011 | 850001 | |
| | | <i>On request</i> |  |  850022  850025 |  |  | <i>On request</i> | <i>On request</i> |  |  | Mini Clamp |
| | | <i>On request</i> | 850005 | | 850039 | 850013 | <i>On request</i> | <i>On request</i> | | | |
| | | <i>On request</i> | <i>On request</i> |  | <i>On request</i> | <i>On request</i> | <i>On request</i> |  |  |  | Thread M16x1,5 |
| | | | | 850024 | | | | 850018 | 850016 | 850015 | |