






MULTI MICRO PORT 49, TYPE C 3"


ART. NO. 840020

GENERAL

-  The KEOFITT MICRO PORT is a re-sealing rubber septum designed to take samples using hypodermic needles or syringes with minimal risk of cross-contamination. Designed for sampling low viscosity products.
-  The sampling valve can be used for any process sampling for chemical and/or physical analysis.
-  The product to be sampled should have a maximum viscosity of 0-50 cP.
-  Please note that the sealing capacity is reduced with piercing.

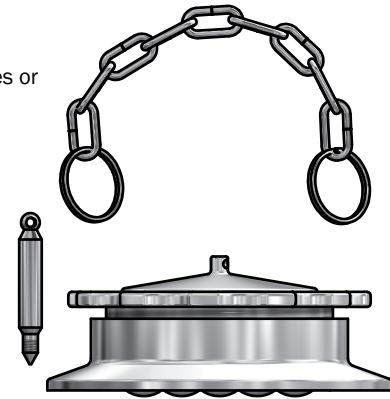

FEATURES

-  Installation: Clamp connection 3"
-  Operation: Manually operated
-  To be used with hypodermic needle (900054)
-  Septum: Butyl IIR (B402F - grey)

CERTIFICATION*

· 3.1 Material Certificate · EU 1935/2004 · FDA §177.2600 · RA certificate


TECHNICAL DATA

Material (product contact)

- Steel parts AISI 316L (1.4404)
- Membrane Butyl IIR (B402F - grey)

Material (without product contact)

- Steel parts AISI 316L (1.4404)
- O-ring EPDM (FDA · EU 1935/2004)

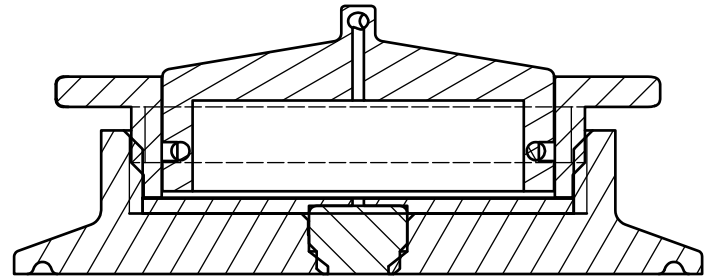

Septum

- Article & Certification* BUTYL IIR, GREY (#900049) FDA · USP · EU 1935/2004

Surface Treatment

- Outside Electropolished Ra <= 1.2 µm
- Inside & process Ra <= 0.5 µm

Pressure & Temperature

- Pressure 0 - 6 bar (g) / 0 - 87 psi (g)
- Temperature 1 - 110 °C / 34 - 230 ° F

Net Weight

- Kg/lbs 0,720 kg / 1,50 lbs

Spareparts

- 778401 PARTS FOR MULTI PORT 840001/20

