

VALVE BODY W9 TYPE T

ART. NO. 850001

= G

GENERAL


The KEOFITT CLASSIC W9 Sampling Valve is the original and leading sterilizable sampling valve in the world. Used in all industries for decades. + 320 standard valve configurations. Unique serial no. for each valve ("E" = internal electro polish).

Valve body designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø3 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media (EHEDG certificate available). Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP (EHEDG test report available) or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact Keofitt.

The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.

FEATURES



CERTIFICATION*

· EHEDG CIP · Conforms to 3-A · 3.1 Material Certificate · EU 1935/2004 · Ra Cert. incl. measurements

TECHNICAL DATA

Material (product contact)

· Steel parts

AISI 316L (1.4404)

Material (without product contact)

AISI 316L (1.4404) · Steel parts · Rubber cap EPDM (black) · Stainless steel chain Stainless steel

Surface Treatment

 Outside · Inside (wetted surface) · Process connection

Electropolished Ra <= 1.2 μ m Electropolished Ra <= $0.5 \,\mu m$ Electropolished Ra <= 0.5 µm

Depending on choice of valve head Depending on choice of valve head

Depending on choice of valve head

Pressure & Temperature

- · Pressure Temperature
- · Air supply

Net Weight


Spareparts


· Kg/lbs


778501

0.317 kg /0,69 lbs

SPARE PARTS FOR W9 850001/03/11/14/21/36

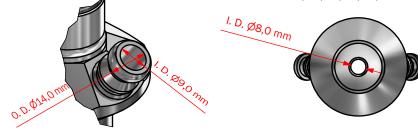

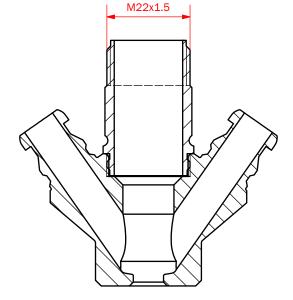

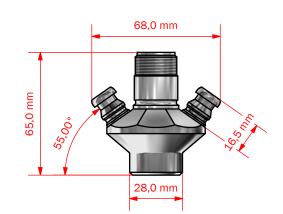

*For further information and download please visit keofitt.dk



Operation: Depending on choice of valve head

Membrane: Depending on choice of valve head

