



## VALVE HEAD W15 TYPE B, PTFE

ART. NO. 865547

### GENERAL



The KEOFITT CLASSIC W15 Sampling Valve is designed for high viscosity sampling such as fruit pulp etc. Design based on the original KEOFITT and based on one-piece-construction. Unique serial no. for each valve ("E" = internal electro polish).



The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.



Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media (EHEDG certificate available). Between samples: Valve in its normal closed position:



Designed for sampling of liquids with a viscosity of up to approx. 50.000 cP containing no particles larger than Ø8 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).



### FEATURES



Installation: Clamped connection



Inlet / Outlet: Depending on choice of valve body



Operation: Turn knob - spring to close (open right)



Membrane: PTFE (TFM 1600 - white)


### CERTIFICATION\*

· Conforms to 3-A · EHEDG CIP · EU 1935/2004

### TECHNICAL DATA

#### Material (product contact)

· Membrane PTFE (TFM 1600 - white)

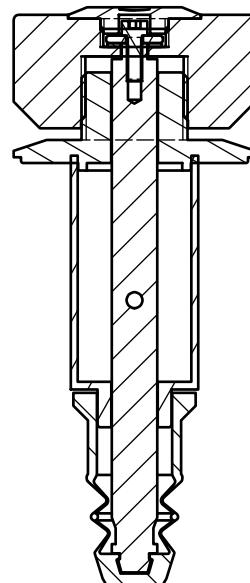

#### Material (without product contact)

· Steel parts	AISI 303L (1.4305)
· Steel parts	AISI 316L (1.4404)
· Knob	HDPE (black)

#### Membrane

· Article	PTFE, WHITE (# 860055)
· Certification*	FDA · USP · EU 1935/2004

#### Pressure & Temperature

· Pressure	0 - 12 bar (g) / 0 - 174 psi (g)
· Temperature	1 - 150°C / 34 - 302°F
· Air supply	-

#### Net Weight

· Kg/lbs	0,558 kg / 1,33 lbs
----------	---------------------

#### Spareparts

778641 PARTS FOR W15 HEAD 865541

